


# DOBLÒ CARGO





ACTIVE

# RANGE

THE PROUD  
COMMUNITY  
OF PROFESSIONALS.

Doblò Cargo offers the widest range in the segment, to grow your business and improve your day. **Van** for goods transport, **Passenger** for goods and people transport, both with two height variants and two lengths.

The new Doblò Trekking offers a distinctive look together with the best capabilities of the model, from the Traction+ to the latest infotainment offer with Apple CarPlay and Android Auto™.





ACTIVE

# MOVER

A BETTER WAY  
TO WORK.

With its wide and versatile range, Doblò Cargo is an invaluable companion for meeting all requirements with fine-tuned and intelligent solutions, such as the regular shape of the load compartment, the convenient handles, the 180° rear door opening and the wide sliding side door. Its low load threshold facilitates loading/unloading operations, while the **volume** of more than **5 m<sup>3</sup>**, the **load capacity** greater than **1 tonne** and the **internal length** of up to **3.4 m** make Doblò Cargo perfect for any use, maintaining its status of “class leading” in the category and the best work companion.





ACTIVE

# DESIGN

## EXTERIOR STYLE AND INTERNAL ROOMINESS.

Doblò Cargo features a **car-like design** with a distinctive front end, a streamlined bonnet that follows the curve of the roof and rear light cluster which emphasises the horizontal flow of the design. These features make for a well-rounded design, with a compact and well-proportioned appearance. Inside the cabin, the space is ergonomic, functional and well organised. All the controls are easy to reach and the dashboard has many spacious storage compartments – like the slow-open compartment, able to hold a 10" tablet – while the door panels have large and versatile pockets.



CONVENIENT AND PRACTICAL LOAD COMPARTMENT THRESHOLD.



REAR WING DOOR HANDLE WHICH IS EASY TO OPEN, EVEN WITH A SINGLE FINGER.

THE LOAD AREA OF THE VAN IS CHARACTERISED BY A SQUARE SHAPE WITH AN AMPLE AND EVEN SURFACE AND HAS BEEN OPTIMISED FOR ALL KINDS OF LOADS. IT PROVIDES A BEST-IN-CLASS VOLUME CAPACITY AND REAR DOOR HEIGHT.



ACTIVE

# COMFORT

FUNCTIONALITY  
GOES ON BOARD.

Everything on board Doblò Cargo has been designed to enhance functionality and comfort. The interior space offers many storage compartments: one underneath the front seat bench, a slow-open **compartment** and the door panel pockets. Great attention has also been paid by adding additional sound-proofing, limiting the noise in the cabin.



## SEATS

Depending on the version, many practical solutions are available for the driver and passenger seats:

- backrest adjustment
- lumbar area adjustment
- armrest adjustment
- passenger backrest that folds down to a table (for Combi version)
- longitudinal seat sliding
- option of fitting side air bags and anti-whiplash headrest.



ACTIVE

# POWER

## STRONG PERFORMANCE.

“Class leading” in terms of handling and driving comfort: Doblò Cargo, thanks to its **Bi-link** suspension, the improved gearbox and clutch and its **wide range of engines**, ensures smooth and comfortable driving in every situation. Its powertrains, ideal both in **town** and on **long distances**, are able to offer more impressive performance, high torque at all speeds and optimal consumption, for great running costs.



# ECOjet

The “EcoJet” versions of the 1.6 MultiJet<sub>2</sub> engines offer a considerable **reduction** in terms of **fuel consumption and emissions level**, thanks to the use of the Start&Stop system, low rolling resistance tyres, low-viscosity oil, “high efficiency” alternator, variable displacement oil pump and aerodynamic pack.

### DIESEL ENGINE RANGE

#### Three MultiJet<sub>2</sub> Diesel engines

1.6 MultiJet<sub>2</sub> 90 HP

1.6 MultiJet<sub>2</sub> 105 HP

1.6 MultiJet<sub>2</sub> 120 HP

### 90 MULTIJET<sub>2</sub>

**Displacement:** 1.598 cm<sup>3</sup>

**Emissions standard:**

Euro 6d-FINAL with SCR and Start&Stop (ECOJET)


**Power:** 66 kW (90 HP)

at 3.750 rpm

**Torque:** 300 Nm (30,6 kgm)

at 1.500 rpm

**Injection:** direct Common Rail MultiJet<sub>2</sub> with electronic control, turbo and intercooler

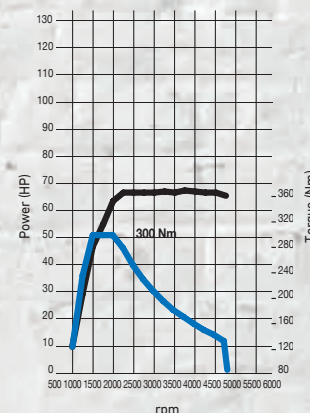

### 105 MULTIJET<sub>2</sub>

**Displacement:** 1.598 cm<sup>3</sup>

**Emissions standard:**

Euro 6d-FINAL with SCR and Start&Stop (ECOJET)


**Power:** 73/77 kW (100/105 HP)

at 3.750 rpm

**Torque:** 320 Nm

(32,6 kgm) at 1.500 rpm

**Injection:** direct Common Rail MultiJet<sub>2</sub> with electronic control, turbo and intercooler

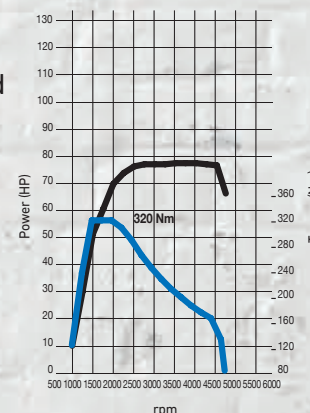

### 120 MULTIJET<sub>2</sub>

**Displacement:** 1.598 cm<sup>3</sup>

**Emissions standard:**

Euro 6d-FINAL with SCR and Start&Stop (ECOJET)


**Power:** 88 kW (120 HP)

at 3.750 rpm

**Torque:** 320 Nm

(32,6 kgm) at 1.500 rpm

**Injection:** direct Common Rail MultiJet<sub>2</sub> with electronic control, turbo and intercooler

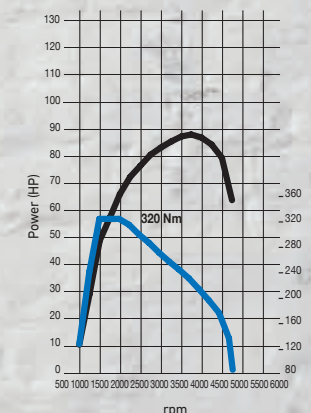

The CO<sub>2</sub> emission and fuel consumption values are defined based on official tests, in conformity with the provisions of the EU Regulations in force at the time of homologation. In particular, the indicated values are calculated based on the WLTP test procedure. The CO<sub>2</sub> and consumption values are only indicated for the purpose of comparing the vehicle data. The CO<sub>2</sub> and consumption homologation values may not be representative of the effective CO<sub>2</sub> and consumption values, which depend on many factors related, for example, to weather and road conditions and to vehicle condition, use and equipment. The CO<sub>2</sub> and consumption values specified in this document refer to the versions of the vehicle with the highest and lowest values. These values may change depending on the selected equipment and/or tyre dimensions. The indicated CO<sub>2</sub> and consumption values are not definitive and may evolve if the production cycle is modified. In any case, the official CO<sub>2</sub> and consumption values of the purchased vehicle will be provided with its accompanying documents. If the CO<sub>2</sub> and consumption values affect the calculation of the vehicle duties and taxes, refer to the applicable standards in force.



ACTIVE

# SAFETY

## PERFECT CONTROL.

In the safety field, road holding is improved by the most advanced electronic stability control devices, such as **ABS** with electronic brake force distributor (EBD), **ESC** complete with ASR (Anti Slip Regulation), HBA (Hydraulic Brake Assist) and **Hill-Holder** (hill start assistance) systems. The TPMS also guarantees constant monitoring of tyre pressure. The front airbags and front side airbags protect both head and chest. Completing the equipment dedicated to safety: Fire Prevention System, body with crumple zones, steering system with collapsible telescopic steering column and knee protection.

### PARKING SENSORS

The ultrasonic parking sensors activate when reverse is engaged and advise the driver that an obstacle is approaching through an intermittent sound.



### BI-LINK - ONE SUSPENSION, MANY USES



#### Standard versions

- excellent road holding
- specific setup for excellent dynamic behaviour



#### Maxi and increased capacity versions

- excellent performance
- longitudinal trailing arms and specific cross bars
- anti-roll bar and specific setup for optimum dynamic performance levels in all load conditions



#### Combi versions

- maximum comfort
- exceptional handling in all driving conditions
- anti-roll bar and specific calibration



### ELECTRONIC STABILITY CONTROL ESC

This standard system intervenes in emergency situations, such as sudden swerving manoeuvres to avoid an obstacle. It monitors parameters such as lateral acceleration, speed, grip and angle of the steering wheel. It processes the data and, if necessary, intervenes on the drive torque and the braking system to bring the vehicle back to conditions of perfect stability.



### TRACTION+

Traction+ is the innovative traction control system that improves traction on the most challenging, low-grip surfaces. If one of the drive wheels loses traction, the control unit detects slippage, brakes the wheel and sends torque to the wheel with most grip. In this way, the vehicle's performance is more comfortable, ensuring the best stability and handling.



### HILL HOLDER

This standard content brakes the vehicle on hill-starts, and stops it rolling backwards without any handbrake input from the driver. It then releases the brake automatically.



### FOG LIGHTS

Installed at the bottom of the front bumper, the fog lights offer maximum efficiency and protection.



### CRUISE CONTROL

Cruise Control allows you to set the cruising speed and keep it constant.



### TYRE PRESSURE MONITORING SYSTEM (TPMS)

This monitors the pressure of the tyres constantly, indicating any loss in pressure directly on the on-board display.



ACTIVE

# VERSATILITY

## CARGO TREKKING.

The New Doblò Trekking has a distinctive style and off-road footprint. Courtesy of the “Traction+” control system, it can completely safely deal with rough, low-adhesion routes. The standout content in the new model consists of the new side moldings with the Trekking logo, roof bars (opt), and specific body-color front and rear bumpers with skid plates. Also available are diamond-cut Trekking alloy wheels.

### DOBLO CARGO TREKKING MAIN CONTENTS



SPECIFIC BODY COLOR REAR BUMPER WITH SKID PLATE



NEW SIDE MOLDINGS WITH THE TREKKING LOGO

ROOF BARS (OPT)



NEW 7" TOUCHSCREEN RADIO, INCLUDING BUILT-IN APPLE CARPLAY AND ANDROID AUTO™ COMPATIBILITY

TRACTION +

SPECIFIC BODY COLOR FRONT BUMPER WITH SKID PLATE

16" ALLOY WHEEL TREKKING DIAMOND CUT (OPT)



ACTIVE

# VERSATILITY

## VAN AND MAXI VAN.

Versatile, robust and agile: the short wheelbase standard roof version of Doblò Cargo is an ideal companion for all types of business. Practical and functional in all situations, it boasts an exceptional capacity and ease of loading. With 35 cm extra length, the Maxi van offers record-breaking interior space and volume.



MAXI VAN



VAN

### VAN AND MAXI VAN RANGE



PANELLED VAN\*



PANELLED VAN

WITH ONE SLIDING SIDE DOOR



PANELLED VAN

WITH TWO SLIDING SIDE DOORS



SEMI-GLAZED VAN



SEMI-GLAZED VAN

WITH ONE SLIDING SIDE DOOR



SEMI-GLAZED VAN

WITH TWO SLIDING SIDE DOORS



GLAZED VAN

WITH TWO SLIDING SIDE DOORS



REAR DOOR

WITH 2 WINGS, PANELLED



REAR ROOF WINDOW\*

AVAILABLE WITH 2 WINGS GLAZED OR PANELLED REAR DOOR (OPT. 585)



REAR DOOR

WITH 2 WINGS, GLAZED (OPT. 519)



TAILGATE

GLAZED (OPT. 148)



### EXTERNAL DIMENSIONS

| Version        | VAN  | MAXI VAN |
|----------------|------|----------|
| Wheelbase (mm) | 2755 | 3105     |
| Length (mm)    | 4406 | 4756     |
| Width (mm)     | 1832 | 1832     |
| Height (mm)    | 1845 | 1880     |

### LOAD COMPARTMENT DIMENSIONS

| Version                              | VAN              | MAXI VAN         |
|--------------------------------------|------------------|------------------|
| Length (mm)                          | 1820             | 2170             |
| Width (mm)                           | 1714             | 1714             |
| Height (mm)                          | 1305             | 1305             |
| Width between wheel arches (mm)      | 1230             | 1230             |
| Load threshold height (unladen) (mm) | 545              | 545              |
| Volume (m <sup>3</sup> )             | 3.4              | 4.2              |
| Payload including driver (kg)        | from 750 to 1005 | from 750 to 1005 |

\* NOT AVAILABLE IN MAXI VERSION



ACTIVE

# VERSATILITY

## XL.

Dedicated to those who demand the ultimate in load space from an agile and compact van. **Doblò Cargo XL** offers an extra long load space and combines it with the versatility of an extra high roof.



XL

## XL VAN RANGE



### PANELLED VAN

WITH TWO SLIDING SIDE DOORS



### SEMI-GLAZED VAN

WITH TWO SLIDING SIDE DOORS

### GLAZED VAN

WITH TWO SLIDING SIDE DOORS



### REAR DOOR

WITH 2 WINGS, PANELLED



### REAR DOOR

WITH 2 WINGS, GLAZED (OPT. 519)



### EXTERNAL DIMENSIONS

| Version        | XL   |
|----------------|------|
| Wheelbase (mm) | 3105 |
| Length (mm)    | 4756 |
| Width (mm)     | 1832 |
| Height (mm)    | 2125 |

### LOAD COMPARTMENT DIMENSIONS

| Version                              | XL   |
|--------------------------------------|------|
| Length (mm)                          | 2170 |
| Width (mm)                           | 1714 |
| Height (mm)                          | 1550 |
| Width between wheel arches (mm)      | 1230 |
| Load threshold height (unladen) (mm) | 545  |
| Volume (m³)                          | 5.0  |
| Payload including driver (kg)        | 1005 |



ACTIVE

VERSATILITY

PASSENGER.

5 comfortable seats and a load capacity of up to 450 kg. Doblò Passenger is the ideal vehicle for mixed people and goods transport and is available with short wheelbase, in Maxi and XL versions.

Also available New Doblò Passenger Trekking short wheelbase.



PASSENGER TREKKING



PASSENGER XL



PASSENGER

WITH 2 SLIDING SIDE DOORS



PASSENGER MAXI

WITH 2 SLIDING SIDE DOORS



PASSENGER XL

WITH 2 SLIDING SIDE DOORS



PASSENGER SEMI-GLAZED

WITH 2 GLAZED SLIDING SIDE DOORS AND A THIRD PANELLED WINDOW (OPT. 526)



PASSENGER MAXI SEMI-GLAZED

WITH 2 GLAZED SLIDING SIDE DOORS AND A THIRD PANELLED WINDOW (OPT. 526)



PASSENGER XL SEMI-GLAZED

WITH 2 GLAZED SLIDING SIDE DOORS AND A THIRD PANELLED WINDOW (OPT. 526)



FOLDING AND FOLD-DOWN REAR SEATS  
REAR SIDE PANELS ONLY AVAILABLE FOR SHORT WHEELBASE VERSIONS



LOAD COMPARTMENT



REAR DOOR

WITH 2 WINGS, PANELLED (OPT. 516)



REAR DOOR

WITH 2 WINGS, GLAZED



TAILGATE

GLAZED



REAR DOOR

WITH 2 WINGS, GLAZED



EXTERNAL DIMENSIONS

| Version        | PASSENGER | PASSENGER MAXI | PASSENGER XL |
|----------------|-----------|----------------|--------------|
| Wheelbase (mm) | 2755      | 3105           | 3105         |
| Length (mm)    | 4406      | 4756           | 4756         |
| Width (mm)     | 1832      | 1832           | 1832         |
| Height (mm)    | 1845      | 1880           | 2125         |

LUGGAGE COMPARTMENT DIMENSIONS

| Version                       | PASSENGER                         | PASSENGER MAXI | PASSENGER XL   |
|-------------------------------|-----------------------------------|----------------|----------------|
| Length (mm)                   | 950                               | 1300           | 1300           |
| Width (mm)                    | 1195                              | 1261           | 1261           |
| Height (mm)                   | 1250                              | 1250           | 1495           |
| Minimum width (mm)            | 1120                              | 1191           | 1191           |
| Rear shelf level (mm)         | 600                               | 600            | 600            |
| Volume                        | 790/<br>3200*                     | 1050/<br>4000* | 1050/<br>4800* |
| Payload including driver (kg) | 5p + 335<br>(+ 450 <sup>■</sup> ) | 5p + 430       | 5p + 425       |

\* With second row of seats folded down, using the entire available height.

■ With opt. 057 reinforced suspension.



ACTIVE

# PERSONALITY

## OPTIONS.

Doblò Cargo is designed to be at the top of the category in terms of functionality and organisation. The wide range of many spacious storage compartments enhances the lifestyle of those at work.

Every detail, such as the internal roof bars and rigid rear shelf, is useful to achieve more and get brilliant results.

### ROOF WINDOW

The upper part of the load compartment can be opened thanks to the practical roof hatch, which permits the transport of long items like ladders or pipes in complete safety.



### INTERNAL ROOF BARS

On request, the load compartment can be fitted with practical roof bars, which allow long objects to be stowed without occupying the lower part of the compartment. This allows all of its capacity to be fully exploited.




### RIGID REAR SHELF

Available only on Combi short wheelbase. Supports up to 70 kg.



### PARTITIONS

The load compartment and cab can be separated by many types of partition. In addition, the panelled and glazed partitions are also available with internal soundproofing.

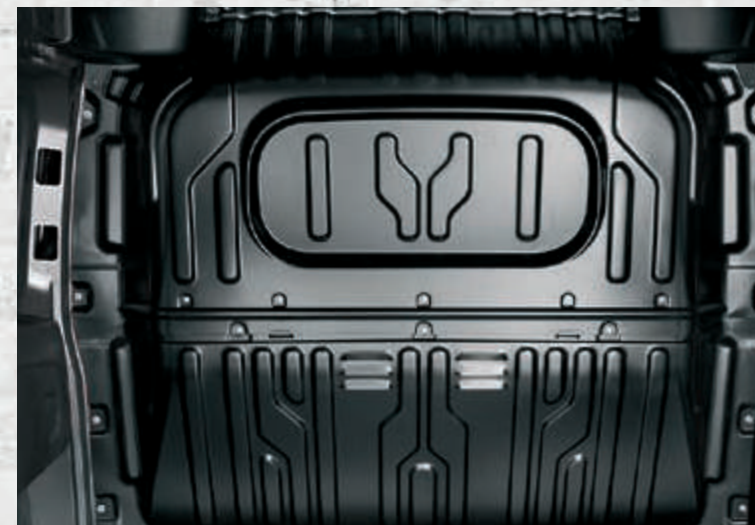

Panelled partition



Glazed partition



Driver side ladder



Load compartment cover



ACTIVE

# PERSONALITY

## OPTIONS.

### ELECTRIC ADJUSTABLE AND FOLDING MIRRORS

Doblò Cargo's double door mirrors ensure a panoramic rear view combined with the utmost practicality, since they can be adjusted and folded electrically from inside. The external mirror spotter can be added to improve your visibility in parking manoeuvres.



### REMOVABLE ROOF LIGHT

The load compartment can be illuminated by a practical roof light that can be removed if needed to act as a portable torch. Once replaced in its housing, the torch will recharge automatically.



### BODY-COLOURED PAINTED BUMPERS

Doblo Cargo features distinctive looks and a modern design thanks to its unique detailing.



### TUNNEL WITH THREE SOCKETS

On the tunnel three power sockets can be available for connecting external devices.



### BODY-COLOURED PAINTED MIRRORS

Added style to enhance the look of your Doblo.



### FOG LIGHTS

Installed in the lower part of the front bumper to ensure maximum safety in low light situations. Optional.



When style meets functionality, both quality of life and professional results improve on board. All the controls such as the electric adjustable and folding mirrors, the tunnel with three sockets and the oddments shelf are easy to reach and make your day more profitable and less tiring.



ACTIVE

# LOOK


## TAILORED TO YOU.

Doblò Cargo offers a wide variety of body colours, seat fabrics, hub caps, rims and alloy wheels. Be proud to create your own Doblò Cargo to get the job done with style.


### PASTEL BODY COLOURS



249 White



168 Red



479 Blue


### METALLIC BODY COLOURS



695 Grey




632 Black




293 Red



612 Light grey



722 Pearl



515 Blue

### FABRICS



260 Star Grey



231 Star Red



246-265 Pacman Grey



279 Pacman Red



310 Tecnospace Grey



329 Tecnospace Red



229 Pierce Grey\*



597 DamierSam Brown

### WHEEL RIMS



15" hub caps



16" hub caps



15" alloy wheel rims



16" alloy wheel rims



16" alloy wheel rims  
Mopar accessory



16" alloy wheel Trekking  
Diamond cut

\* Imitation leather



ACTIVE

## CUSTOMISATION

**PERSONALITY ALWAYS  
MAKES A DIFFERENCE.  
AT WORK TOO.**

**Doblò Cargo** is completed by a wide range of original accessories, all of extremely high quality, created by **Mopar®**, the official brand for **Services, Customer Care, Original Spare Parts and Accessories** for the brands of FCA.



*At your service*



ROOF BARS. KIT OF 3 ALUMINIUM BARS



FRONT AIR DEFLECTORS



SIDE LADDER TILT FOR ROOF BARS



REAR SPLASH GUARDS



PIPE CARRIER FOR ROOF BARS



FRONT RUBBER MATS

TECHNICAL SPECIFICATION

| Diesel                                                        | 90 MULTIJET <sub>2</sub>                                                                                                                              |                                         | 105 MULTIJET <sub>2</sub>                                                                                                                             | 120 MULTIJET <sub>2</sub>                                                                                                                             |
|---------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| Engine                                                        |                                                                                                                                                       |                                         |                                                                                                                                                       |                                                                                                                                                       |
| No. of cylinders, layout                                      | 4 in-line, transverse front                                                                                                                           |                                         | 4 in-line, transverse front                                                                                                                           | 4 in-line, transverse front                                                                                                                           |
| Displacement (cm³)                                            | 1598                                                                                                                                                  |                                         | 1598                                                                                                                                                  | 1598                                                                                                                                                  |
| Emissions level                                               | Euro 6d-Final with SCR and S&S (ECOJET)                                                                                                               |                                         | Euro 6d-Final with SCR and S&S (ECOJET)                                                                                                               | Euro 6d-Final with SCR and S&S (ECOJET)                                                                                                               |
| Compression ratio                                             | 16.5:1                                                                                                                                                |                                         | 16.5:1                                                                                                                                                | 16.5:1                                                                                                                                                |
| EC Max. power: kW (HP) at rpm                                 | 66 (90) 3750                                                                                                                                          |                                         | 77 (105) 3750                                                                                                                                         | 88 (120) 3750                                                                                                                                         |
| EC Max. torque: Nm @ rpm                                      | 300 (30.6) 1500                                                                                                                                       |                                         | 320 (30.6) 1750                                                                                                                                       | 320 (32.6) 1750                                                                                                                                       |
| Timing system (control)                                       | 2 OHC (with chain) with hydraulic tappets 4 valves per cylinder                                                                                       |                                         | 2 OHC (toothed belt) with hydraulic tappets 4 valves per cylinder                                                                                     | 2 OHC (toothed belt) with hydraulic tappets 4 valves per cylinder                                                                                     |
| Fuel included                                                 | diesel fuel for motor vehicles (EN 590)                                                                                                               |                                         | diesel fuel for motor vehicles (EN 590)                                                                                                               | diesel fuel for motor vehicles (EN 590)                                                                                                               |
| Supply                                                        | Common Rail MultiJet, direct injection electronically controlled, turbo and intercooler                                                               |                                         | Common Rail MultiJet, direct injection electronically controlled, turbo and intercooler                                                               | Common Rail MultiJet, direct injection electronically controlled, turbo and intercooler                                                               |
| Ignition                                                      | by compression                                                                                                                                        |                                         | by compression                                                                                                                                        | by compression                                                                                                                                        |
| Transmission                                                  |                                                                                                                                                       |                                         |                                                                                                                                                       |                                                                                                                                                       |
| Drive                                                         | front                                                                                                                                                 |                                         | front                                                                                                                                                 | front                                                                                                                                                 |
| Clutch                                                        | dry, single plate with cup engagement spring and hydraulic operation                                                                                  |                                         | dry, single plate with cup engagement spring and hydraulic operation                                                                                  | dry, single plate with cup engagement spring and hydraulic operation                                                                                  |
| Gearbox: number of gears                                      | 6 + R                                                                                                                                                 |                                         | 6 + R                                                                                                                                                 | 6 + R                                                                                                                                                 |
| Steering                                                      |                                                                                                                                                       |                                         |                                                                                                                                                       |                                                                                                                                                       |
| Type                                                          | rack and pinion with hydraulic power steering                                                                                                         |                                         | rack and pinion with hydraulic power steering                                                                                                         | rack and pinion with hydraulic power steering                                                                                                         |
| Turning circle (kerb-to-kerb)                                 | 11.2 / 12.5 (Maxi and XL)                                                                                                                             |                                         | 11.2/12.5 (Maxi and XL)                                                                                                                               | 11.2 / 12.5 (Long Wheelbase)                                                                                                                          |
| Braking system - D (self-ventilated disc) - T (drum)          |                                                                                                                                                       |                                         |                                                                                                                                                       |                                                                                                                                                       |
| Type                                                          | hydraulic system with 2 crossover independent circuits                                                                                                |                                         | hydraulic system with 2 crossover independent circuits                                                                                                | hydraulic system with 2 crossover independent circuits                                                                                                |
| Front: ø mm                                                   | D 284 - D 305 (Maxi and extra capacity)                                                                                                               |                                         | D284 / D305 (Maxi and extra capacity)                                                                                                                 | D284 / D305 (Maxi and 120 HP)                                                                                                                         |
| Rear: ø mm                                                    | T 228 - T 254 (Maxi and extra capacity and Combi)                                                                                                     |                                         | T 228 - T 254 (Maxi and extra capacity and Combi)                                                                                                     | T 254                                                                                                                                                 |
| Servo brake: ø                                                | 10"                                                                                                                                                   |                                         | 10"                                                                                                                                                   | 10"                                                                                                                                                   |
| Suspension                                                    |                                                                                                                                                       |                                         |                                                                                                                                                       |                                                                                                                                                       |
| Front                                                         | independent, MacPherson type with wishbones secured to an auxiliary crossmember, telescopic hydraulic shock absorbers, coil springs and anti-roll bar |                                         | independent, MacPherson type with wishbones secured to an auxiliary crossmember, telescopic hydraulic shock absorbers, coil springs and anti-roll bar | independent, MacPherson type with wishbones secured to an auxiliary crossmember, telescopic hydraulic shock absorbers, coil springs and anti-roll bar |
| Rear                                                          | Bi-link independent, coil springs, telescopic shock absorbers with dual calibration and anti-roll bar (according to versions)                         |                                         | Bi-link independent, coil springs, telescopic shock absorbers with dual calibration and anti-roll bar (according to versions)                         | Bi-link independent, coil springs, telescopic shock absorbers with dual calibration and anti-roll bar (according to versions)                         |
| Wheels                                                        |                                                                                                                                                       |                                         |                                                                                                                                                       |                                                                                                                                                       |
| Tyres                                                         | 185/65 R 15 - 195/60 R 16                                                                                                                             |                                         | 195/60 R 16                                                                                                                                           | 195/60 R 16                                                                                                                                           |
| Electrical system (12V)                                       |                                                                                                                                                       |                                         |                                                                                                                                                       |                                                                                                                                                       |
| Battery capacity (Ah)                                         | 63                                                                                                                                                    |                                         | 72                                                                                                                                                    | 72                                                                                                                                                    |
| Alternator current (A)                                        | 150                                                                                                                                                   |                                         | 150 / 180                                                                                                                                             | 150 / 180                                                                                                                                             |
| Refuelling                                                    |                                                                                                                                                       |                                         |                                                                                                                                                       |                                                                                                                                                       |
| Fuel tank capacity (litres)                                   | 60                                                                                                                                                    |                                         | 60                                                                                                                                                    | 60                                                                                                                                                    |
| Urea tank Capacity (Litres)                                   | 14                                                                                                                                                    |                                         | 14                                                                                                                                                    | 14                                                                                                                                                    |
| Performance and fuel consumption WLTP - Cargo short wheelbase |                                                                                                                                                       | Euro 6d-Final with SCR and S&S (ECOJET) | Euro 6d-Final with SCR and S&S (ECOJET)                                                                                                               | Euro 6d-Final with SCR and S&S (ECOJET)                                                                                                               |
| Top speed mph (km/h)                                          | 105 (170)                                                                                                                                             |                                         | 105 (170)                                                                                                                                             | 109 (176)                                                                                                                                             |
| Combined consumption mpg (l/100km)                            | 50.4 (5.6) - 44.1 (6.4)                                                                                                                               |                                         | 50.4 (5.6) - 44.1 (6.4)                                                                                                                               | 50.4 (5.6) - 43.4 (6.5)                                                                                                                               |
| CO <sub>2</sub> emissions (g/km)                              | 147 - 169                                                                                                                                             |                                         | 147 - 168                                                                                                                                             | 147 - 169                                                                                                                                             |


All values are referred to N1 homologation      \* Urea Tank for Doblo Work-up 13 Lt

The CO<sub>2</sub> emission and fuel consumption values are defined based on official tests, in conformity with the provisions of the EU Regulations in force at the time of homologation. In particular, the indicated values are calculated based on the WLTP test procedure. The CO<sub>2</sub> and consumption values are only indicated for the purpose of comparing the vehicle data. The CO<sub>2</sub> and consumption homologation values may not be representative of the effective CO<sub>2</sub> and consumption values, which depend on many factors related, for example, to weather and road conditions and to vehicle condition, use and equipment.

The CO<sub>2</sub> and consumption values specified in this document refer to the versions of the vehicle with the highest and lowest values. These values may change depending on the selected equipment and/or tyre dimensions. The indicated CO<sub>2</sub> and consumption values are not definitive and may evolve if the production cycle is modified. In any case, the official CO<sub>2</sub> and consumption values of the purchased vehicle will be provided with its accompanying documents. If the CO<sub>2</sub> and consumption values affect the calculation of the vehicle duties and taxes, refer to the applicable standards in force.

STANDARD SHORT WHEELBASE

| Exterior dimensions (mm)       |      |
|--------------------------------|------|
| Wheelbase                      | 2755 |
| Length                         | 4406 |
| Width                          | 1832 |
| Front track                    | 1510 |
| Rear track                     | 1530 |
| Maximum height (unladen)       | 1845 |
| Front overhang                 | 911  |
| Rear overhang                  | 740  |
| Rear door (mm)                 |      |
| Width                          | 1231 |
| Height                         | 1250 |
| Sliding side door (mm)         |      |
| Width                          | 700  |
| Height                         | 1175 |
| Loading compartment (mm)       |      |
| Length                         | 1820 |
| Width                          | 1714 |
| Width between wheel arches     | 1230 |
| Height                         | 1305 |
| Load threshold height (mm)     | 545  |
| Load compartment capacity (m³) |      |
| Volume                         | 3.4  |

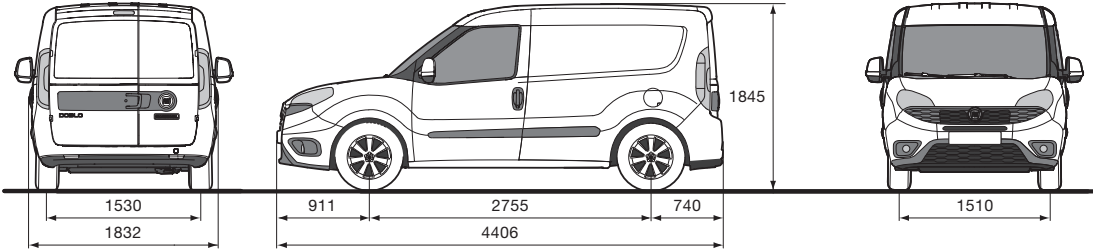

| Weight                              |  | Standard van             |                           | Extra capacity van       |                           |
|-------------------------------------|--|--------------------------|---------------------------|--------------------------|---------------------------|
| Engine versions                     |  | 90 MultiJet <sup>▲</sup> | 105 MultiJet <sup>▲</sup> | 90 MultiJet <sup>▲</sup> | 105 MultiJet <sup>▲</sup> |
| Vehicle weight ▲ (kerb weight) (kg) |  | 1395                     | 1395                      | 1440                     | 1440                      |
| Payload including driver (kg)       |  | 705                      | 705                       | 1035                     | 1035                      |
| GVW (kg)                            |  | 2100                     | 2100                      | 2475                     | 2475                      |
| Max. towable weight (kg)            |  | 1300                     | 1300                      | 1300                     | 1300                      |


| Fuel consumption - Emissions WLTP  |  | Standard van                                                        |                                                                      | Extra capacity van                                                  |                                                                      |
|------------------------------------|--|---------------------------------------------------------------------|----------------------------------------------------------------------|---------------------------------------------------------------------|----------------------------------------------------------------------|
| Engine versions                    |  | 90 MultiJet <sup>▲</sup><br>Euro 6d-Final with SCR and S&S (ECOJET) | 105 MultiJet <sup>▲</sup><br>Euro 6d-Final with SCR and S&S (ECOJET) | 90 MultiJet <sup>▲</sup><br>Euro 6d-Final with SCR and S&S (ECOJET) | 105 MultiJet <sup>▲</sup><br>Euro 6d-Final with SCR and S&S (ECOJET) |
| Fuel included                      |  | diesel                                                              | diesel                                                               | diesel                                                              | diesel                                                               |
| Combined consumption mpg (l/100km) |  | 50.4 (5.6) - 45.5 (6.2)                                             | 50.4 (5.6) - 45.5 (6.2)                                              | 50.4 (5.6) - 45.5 (6.2)                                             | 50.4 (5.6) - 45.5 (6.2)                                              |
| CO <sub>2</sub> emissions (g/km)   |  | 147 - 163                                                           | 147 - 163                                                            | 147 - 163                                                           | 147 - 163                                                            |

| Fuel consumption - Emissions WLTP  |  | Extra capacity van                                                  |                                                                      |
|------------------------------------|--|---------------------------------------------------------------------|----------------------------------------------------------------------|
| Engine versions                    |  | 90 MultiJet <sup>▲</sup><br>Euro 6d-Final with SCR and S&S (ECOJET) | 105 MultiJet <sup>▲</sup><br>Euro 6d-Final with SCR and S&S (ECOJET) |
| Fuel included                      |  | diesel                                                              | diesel                                                               |
| Combined consumption mpg (l/100km) |  | 47.8 (5.9) - 44.1 (6.4)                                             | 48.7 (5.8) - 44.1 (6.4)                                              |
| CO <sub>2</sub> emissions (g/km)   |  | 153 - 169                                                           | 153 - 168                                                            |

▲ Refers to basic versions without options

MAXI

| Exterior dimensions (mm)       |      |
|--------------------------------|------|
| Wheelbase                      | 3105 |
| Length                         | 4756 |
| Width                          | 1832 |
| Front track                    | 1510 |
| Rear track                     | 1530 |
| Maximum height (unladen)       | 1880 |
| Front overhang                 | 911  |
| Rear overhang                  | 740  |
| Rear door (mm)                 |      |
| Width                          | 1231 |
| Height                         | 1250 |
| Sliding side door (mm)         |      |
| Width                          | 700  |
| Height                         | 1175 |
| Loading compartment (mm)       |      |
| Length                         | 2170 |
| Width                          | 1714 |
| Width between wheel arches     | 1230 |
| Height                         | 1305 |
| Load threshold height (mm)     | 545  |
| Load compartment capacity (m³) |      |
| Volume                         | 4.2  |

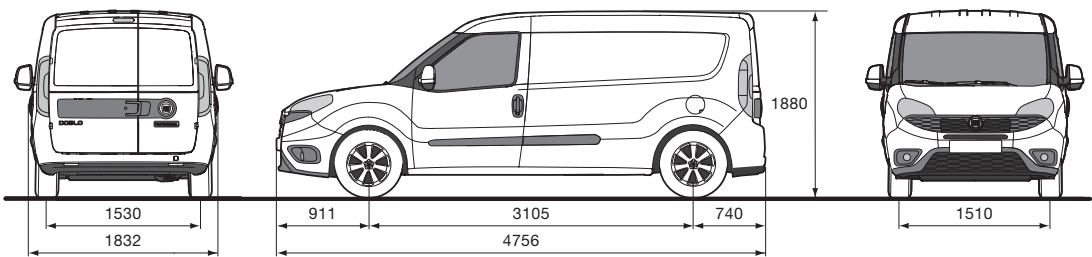


| Weight                              |  | Standard van             |                                 |
|-------------------------------------|--|--------------------------|---------------------------------|
| Engine versions                     |  | 90 MultiJet <sup>▲</sup> | 105 - 120 MultiJet <sup>▲</sup> |
| Vehicle weight ▲ (kerb weight) (kg) |  | 1480                     | 1480                            |
| Payload including driver (kg)       |  | 1005                     | 1005                            |
| GVW (kg)                            |  | 2485                     | 2485                            |
| Max. towable weight (kg)            |  | 1300                     | 1300                            |

| Fuel consumption - Emissions WLTP  |  | Standard van                                                        |                                                                            |
|------------------------------------|--|---------------------------------------------------------------------|----------------------------------------------------------------------------|
| Engine versions                    |  | 90 MultiJet <sup>▲</sup><br>Euro 6d-Final with SCR and S&S (ECOJET) | 105 - 120 MultiJet <sup>▲</sup><br>Euro 6d-Final with SCR and S&S (ECOJET) |
| Fuel included                      |  | diesel                                                              | diesel                                                                     |
| Combined consumption mpg (l/100km) |  | 48.7 (5.8) - 44.1 (6.4)                                             | 48.7 (5.8) - 44.1 (6.4)                                                    |
| CO <sub>2</sub> emissions (g/km)   |  | 152 - 167                                                           | 151 - 168                                                                  |

Figures shown are for comparability purposes; only compare fuel consumption and CO<sub>2</sub> figures with other cars tested to the same technical procedures. These figures may not reflect real life driving results, which will depend upon a number of factors including the accessories fitted (post-registration), variations in weather, driving styles and vehicle load.

▲ Refers to basic versions without options

| Exterior dimensions (mm)       |      |
|--------------------------------|------|
| Wheelbase                      | 3105 |
| Length                         | 4756 |
| Width                          | 1832 |
| Front track                    | 1510 |
| Rear track                     | 1530 |
| Maximum height (unladen)       | 2125 |
| Front overhang                 | 911  |
| Rear overhang                  | 740  |
| Rear door (mm)                 |      |
| Width                          | 1231 |
| Height                         | 1455 |
| Sliding side door (mm)         |      |
| Width                          | 700  |
| Height                         | 1175 |
| Loading compartment (mm)       |      |
| Length                         | 2170 |
| Width                          | 1714 |
| Width between wheel arches     | 1230 |
| Height                         | 1550 |
| Load threshold height (mm)     | 545  |
| Load compartment capacity (m³) |      |
| Volume                         | 5.0  |

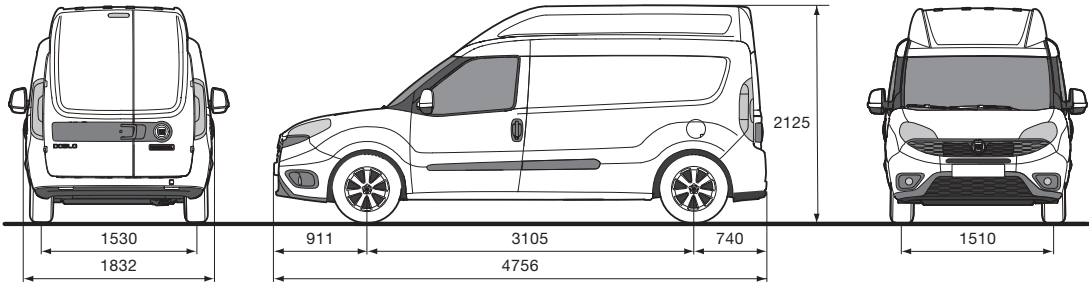

| Weight                              |               |
|-------------------------------------|---------------|
| Engine versions                     | 120 MultiJet, |
| Vehicle weight ▲ (kerb weight) (kg) | 1505          |
| Payload including driver (kg)       | 1005          |
| GVW (kg)                            | 2510          |
| Max. towable weight (kg)            | 1300          |

| Fuel consumption - Emissions WLTP  |                                         |
|------------------------------------|-----------------------------------------|
| Engine versions                    | 120 MultiJet,                           |
|                                    | Euro 6d-Final with SCR and S&S (ECOJET) |
| Fuel included                      | diesel                                  |
| Combined consumption mpg (l/100km) | 47.0 (6.0) - 43.4 (6.5)                 |
| CO <sub>2</sub> emissions (g/km)   | 157 - 169                               |


Figures shown are for comparability purposes; only compare fuel consumption and CO<sub>2</sub> figures with other cars tested to the same technical procedures. These figures may not reflect real life driving results, which will depend upon a number of factors including the accessories fitted (post-registration), variations in weather, driving styles and vehicle load.

▲ Refers to basic versions without options



PASSENGER SHORT WHEELBASE

|                                       |             |
|---------------------------------------|-------------|
| Exterior dimensions (mm)              |             |
| Wheelbase                             | 2755        |
| Length                                | 4406        |
| Width                                 | 1832        |
| Front track                           | 1510        |
| Rear track                            | 1530        |
| Maximum height (unladen)              | 1845-1895** |
| Front overhang                        | 911         |
| Rear overhang                         | 740         |
| Luggage compartment (mm)              |             |
| Length                                | 950         |
| Minimum length                        | 1120        |
| Maximum width                         | 1195        |
| Height up to rear window shelf        | 600         |
| Maximum height                        | 1250        |
| Luggage compartment capacity (litres) |             |
| Volume                                | 790/3200*   |

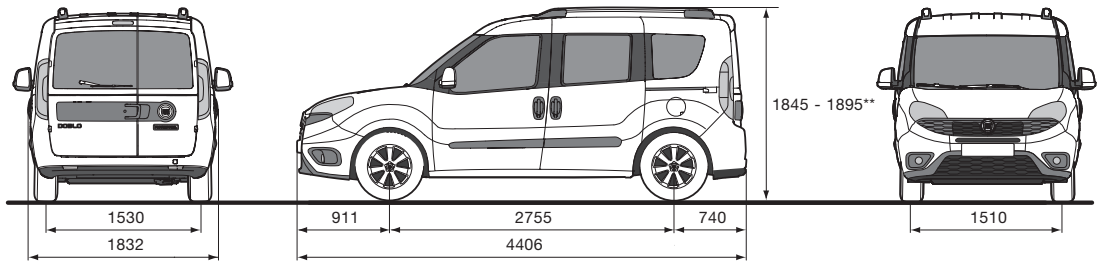

|                                     |                          |
|-------------------------------------|--------------------------|
| Weight                              |                          |
| Engine versions                     | 90 MultiJet <sub>2</sub> |
| Vehicle weight * (kerb weight) (kg) | 1520 (1505)              |
| Payload including driver (kg)       | 5p + 335 (+ 425 m)       |
| GVW (kg)                            | 2230 (2330)              |
| Max. towable weight (kg)            | 1300                     |


|                                    |                                                                     |
|------------------------------------|---------------------------------------------------------------------|
| Fuel consumption - Emissions WLTP  |                                                                     |
| Engine versions                    | 90 MultiJet <sub>2</sub><br>Euro 6d-Final with SCR and S&S (ECOJET) |
| Fuel included                      | diesel                                                              |
| Combined consumption mpg (l/100km) | 48.7 (5.8) - 45.5 (6.2)                                             |
| CO <sub>2</sub> emissions (g/km)   | 153 - 161                                                           |

All values are referred to N1 homologation

\* With back seats folded down without tubular partition    ▲ Refers to basic versions without options    \*\* With opt 357 longitudinal bars

PASSENGER MAXI

|                                       |             |
|---------------------------------------|-------------|
| Exterior dimensions (mm)              |             |
| Wheelbase                             | 3105        |
| Length                                | 4756        |
| Width                                 | 1832        |
| Front track                           | 1510        |
| Rear track                            | 1530        |
| Maximum height (unladen)              | 1880-1927** |
| Front overhang                        | 911         |
| Rear overhang                         | 740         |
| Luggage compartment (mm)              |             |
| Length                                | 1300        |
| Minimum length                        | 1191        |
| Maximum width                         | 1261        |
| Height up to rear window shelf        | 600         |
| Maximum height                        | 1250        |
| Luggage compartment capacity (litres) |             |
| Volume                                | 1050/4000*  |

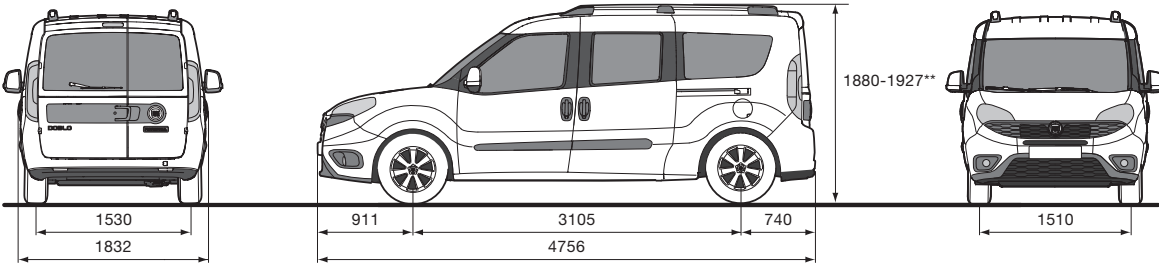

|                                     |                                                          |
|-------------------------------------|----------------------------------------------------------|
| Weight                              |                                                          |
| Engine versions                     | 90 MultiJet <sub>2</sub> 105 - 120 MultiJet <sub>2</sub> |
| Vehicle weight * (kerb weight) (kg) | 1570      1570                                           |
| Payload including driver (kg)       | 5p + 430      5p + 450                                   |
| GVW (kg)                            | 2375      2375                                           |
| Max. towable weight (kg)            | 1300      1300                                           |

|                                    |                                                                     |
|------------------------------------|---------------------------------------------------------------------|
| Fuel consumption - Emissions WLTP  |                                                                     |
| Engine versions                    | 90 MultiJet <sub>2</sub><br>Euro 6d-Final with SCR and S&S (ECOJET) |
| Fuel included                      | diesel                                                              |
| Combined consumption mpg (l/100km) | 47.8 (5.9) - 45.5 (6.2)                                             |
| CO <sub>2</sub> emissions (g/km)   | 156 - 163                                                           |

|                                    |                                                                            |
|------------------------------------|----------------------------------------------------------------------------|
| Fuel consumption - Emissions WLTP  |                                                                            |
| Engine versions                    | 105 - 120 MultiJet <sub>2</sub><br>Euro 6d-Final with SCR and S&S (ECOJET) |
| Fuel included                      | diesel                                                                     |
| Combined consumption mpg (l/100km) | 47.8 (5.9) - 46.3 (6.1)                                                    |
| CO <sub>2</sub> emissions (g/km)   | 155 - 161                                                                  |


All values are referred to N1 homologation

Figures shown are for comparability purposes; only compare fuel consumption and CO<sub>2</sub> figures with other cars tested to the same technical procedures. These figures may not reflect real life driving results, which will depend upon a number of factors including the accessories fitted (post-registration), variations in weather, driving styles and vehicle load.

\* With back seats folded down without tubular partition    \*\* With opt 357 longitudinal bars    ▲ Refers to basic versions without options

PASSENGER XL

| Exterior dimensions (mm)              |            |
|---------------------------------------|------------|
| Wheelbase                             | 3105       |
| Length                                | 4756       |
| Width                                 | 1832       |
| Front track                           | 1510       |
| Rear track                            | 1530       |
| Maximum height (unladen)              | 2125       |
| Front overhang                        | 911        |
| Rear overhang                         | 740        |
| Luggage compartment (mm)              |            |
| Length                                | 1300       |
| Minimum length                        | 1191       |
| Maximum width                         | 1261       |
| Height up to rear window shelf        | 600        |
| Maximum height                        | 1495       |
| Luggage compartment capacity (litres) |            |
| Volume                                | 1050/4800* |

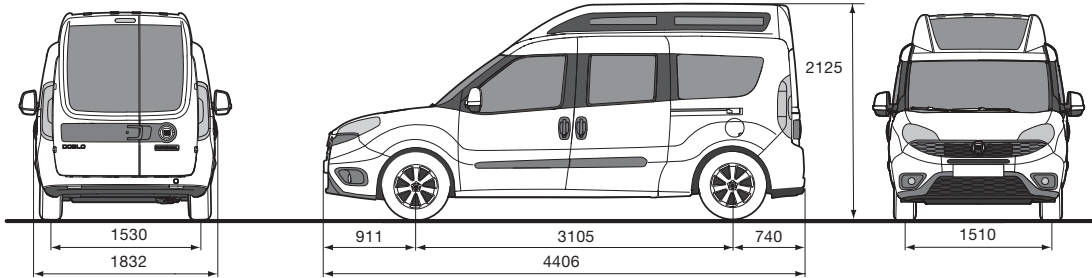

| Weight                              |                           |
|-------------------------------------|---------------------------|
| Engine versions                     | 120 MultiJet <sub>2</sub> |
| Vehicle weight ▲ (kerb weight) (kg) | 1595                      |
| Payload including driver (kg)       | 5p + 425                  |
| GVW (kg)                            | 2395                      |
| Max. towable weight (kg)            | 1300                      |

| Fuel consumption - Emissions WLTP  |                                                                      |
|------------------------------------|----------------------------------------------------------------------|
| Engine versions                    | 120 MultiJet <sub>2</sub><br>Euro 6d-Final with SCR and S&S (ECOJET) |
| Fuel included                      | diesel                                                               |
| Combined consumption mpg (l/100km) | 46.3 (6.1) - 44.8 (6.3)                                              |
| CO <sub>2</sub> emissions (g/km)   | 161 - 164                                                            |

All values are referred to N1 homologation



Figures shown are for comparability purposes; only compare fuel consumption and CO<sub>2</sub> figures with other cars tested to the same technical procedures. These figures may not reflect real life driving results, which will depend upon a number of factors including the accessories fitted (post-registration), variations in weather, driving styles and vehicle load.

\* With back seats folded down without tubular partition

▲ Refers to basic versions without options

## VEHICLE WARRANTY

With your new Fiat Professional vehicle comes a 24-month warranty starting from the vehicles first registration date and without mileage limits as well as an additional 12 month retailer warranty valid for 12 months, with mileage restrictions indicated in the vehicles warranty booklet. The warranty covers factory defects which will be repaired free of charge using original new and reconditioned parts. Operations under warranty are carried out by FCA retailers and include:

- repair or replacement of the faulty part;
- labour for repair or replacement operations;
- supply of consumables needed to carry out repairs under Warranty.

### Paintwork warranty

The vehicle is covered against factory defects regarding paintwork for 36 months starting from the vehicles first registration date. The warranty includes the complete or partial repainting of the vehicle, in order to remove the fault determined according to the Manufacturer's standard conditions.

### Perforating rust warranty

Structural elements of the body are covered against perforation due to corrosion, as long as this takes place from the inside outwards. The warranty includes the repair and/or replacement of any original structural element of the body perforated by corrosion, and is valid for a period of 8 years starting from the vehicles first registration date.

We recommend that you check the specific coverage conditions in your warranty booklet.

## CIAO FIAT CUSTOMER SERVICE

You can call Fiat Professional free of charge on 0080034280000\* from anywhere in Europe. We are at your disposal to provide roadside assistance 365 days a year, 24 hours a day. If you contact the Fiat Customer Service, you can also request information about our models, services and Dealership Network. You can also book a test drive of any vehicle you like. Whatever you need, we're here for you.

\* Check the cost with your operator beforehand when calling from abroad or from a mobile network.



## SPECIAL SALES PROGRAMMES

Customised mobility solutions? Autonomy is aimed at people with reduced motor abilities and proposes specific trim levels for passenger transport vehicles, roadside assistance and financial services. It also offers comprehensive assistance in obtaining a special driving licence from Mobility Centres. Call the free-phone number 800-838333 to obtain full and complete information based on your needs.



## MY FIAT PROFESSIONAL

Take care of your Fiat Professional with a click! Register on my FIAT PROFESSIONAL. You'll get personalised advice, dedicated tools and exclusive promotions. Go to [my.fiatprofessional.com](http://my.fiatprofessional.com).

my Fiat Professional



## FINANCIAL AND INSURANCE SERVICES

However you choose to experience mobility, Fiat Professional Financial Services satisfies your needs with financial and leasing packages combined with exclusive services. For more information, call the Customer Service Team 03445614738 (from Monday to Friday from 9.00 a.m. to 6.00 p.m.) or visit the [www.fcaautomotiveservices.co.uk](http://www.fcaautomotiveservices.co.uk) website.

Find out how to get your Doblo with Fiat Professional Financial Services' innovative finance solutions.

Whether you're an individual, a self-employed professional or an entrepreneur, Fiat Professional Financial Services offers you a wide range of products to assist your purchase of a Doblo and drive in complete freedom.

With Fiat Professional Financial Services you can combine high-added-value services tailor made to meet your every requirement. For more information, visit [www.fcaautomotiveservices.co.uk](http://www.fcaautomotiveservices.co.uk).



## LEASYS MOBILITY SOLUTION

LEASYS offers customized mobility solutions for drive your new Ducato without its ownership. Long term hire is the perfect solution for companies and tradespeople that want to exploit and enjoy all the advantages of their new vehicle, without its ownership and the related obligations. Long-term hire offers a number of tangible advantages:

- No initial investment to purchase the vehicle
- No unexpected costs, the fixed rate is defined according to the duration of the contract, the estimated mileage and any additional services. Standard and non-standard maintenance costs are included
- No risk of depreciation, at the end of the contract, the vehicle is simple returned, thus eliminating the worry of selling a used vehicle
- No waste of time, mobility is always guaranteed.

For information contact your Dealership or visit the [www.leasys.com](http://www.leasys.com) website or call the free-phone number 800334422



## MOPAR® VEHICLE PROTECTION

MOPAR® VEHICLE PROTECTION offers a number of service agreements specially designed to ensure all its customers the pleasure of worry-free driving. Our product portfolio consists of a wide and flexible range of extended warranties and service plans authorised by Fiat Professional. Every agreement adapts to the customer's driving requirements, with different solutions that vary in duration and mileage. Only with Mopar® Vehicle Protection can you be sure that all servicing will be performed by highly qualified and specialised professionals at authorised Fiat Professional repair workshops throughout Europe, where only genuine spare parts will be used. Choose the Service Agreement that best fits your driving requirements.

### MAXIMUM CARE: ZERO WORRIES WHEREVER YOU ARE

Make sure you travel safely with the extended warranty covering the mechanical and electrical components of your vehicle, in addition to your standard 3 year warranty valid in the UK and abroad. The widest offer that fits the customer's needs, with solutions varying in terms of duration and mileage, with up to 120,000 miles and 2 3 years in addition to your standard 3 year warranty.

### EASY CARE: MAINTENANCE AT FIXED PRICES

The scheduled maintenance plan designed to ensure you have a fixed price on the servicing necessary to take care of your vehicle so it is always kept in perfect running condition. Up to 5 years of coverage, with varying solutions in terms of duration and mileage. Lengthen the lifetime of your vehicle by making sure you carry out all the scheduled servicing necessary to ensure the best performance, as always.

N.B. The Mopar® Vehicle Protection assistance contracts can be signed directly when you purchase a new vehicle. EASY CARE can be signed at any time before the first scheduled servicing, while MAXIMUM CARE can be signed within 14 days from the date of vehicle registration.





ACTIVE

# RANGE

## FIAT PROFESSIONAL

### A PRO LIKE YOU.

Real professionals only work with the best tools. That's why **FIAT PROFESSIONAL** is the best companion you could have, whatever your needs are.



## DOBLÒ

You couldn't ask for a better way to work. You couldn't ask for a better business card. Simply unique. Just like your job.



## FIORINO

The vehicle that invented the category. Agile and capable. Cities love it. And so do the Professionals.



## TALENTO

Ingenious and talented. It offers the tools to find solutions to problems and make opportunities out of challenges. Day by day.



## DUCATO

It's the undisputed leader in the world of work. Strong, versatile and indispensable to everyone.





**A PRO LIKE YOU**



[www.fiatprofessional.com](http://www.fiatprofessional.com)